



SK1-FSA-34/16/8-PBS-PP-M2/Y1


CS008M

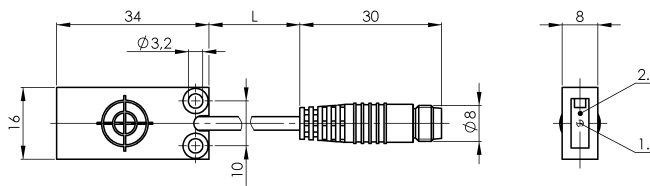

Connector view



Wiring Diagram



1) Potentiometer 2) LED function indicator



### Electrical connection

Cable length	0.2 m
Connection	M8x1-Connector, 3-pole
Connection type	Cable with connector, 0.20 m, PUR
Polarity reversal protected	yes
Short-circuit protection	yes

### Electrical data

Hysteresis H max. (% of Sr)	15.0 %
MTTF (40 °C)	462 a
Operating voltage $U_b$	12...30 VDC
Protected against miswiring	yes
Rated insulation voltage $U_i$	75 V DC
Rated operating current $I_e$ DC	50 mA
Ready delay $t_v$ max.	100 ms
Repeat accuracy max. (% of Sr)	5.0 %
Switching frequency	2 Hz
Utilization category	DC-13
Voltage drop static max.	1.5 V

### Environmental conditions

Ambient temperature	-30...70 °C
Protection type IEC 60529	IP67

### Functional safety

Diagnostic coverage	0 %
Functional safety	no

### General data

Approval/Conformity	CE cULus
Basic standard	IEC 60947-5-2
Scope of delivery	Holder
Sensitivity	media-dependent, adjustable
Series	Level sensor

### Material

Cover material	PP
Housing material	PP
Material cover	PP
Material jacket	PUR
Material sensing surface	PP

### Mechanical data

Dimension	34 x 16 x 8 mm
Installation	flush with container outer wall

### Output/Interface

Switching output	PNP Normally open (NO)
------------------	------------------------

### Range/Distance

Measuring range	0.5...8 mm
Range	0.5...8 mm
Rated operating distance $S_n$	7 mm
Ripple max. (% of $U_e$ )	10 %
Temperature drift max. (% of Sr)	20 %