



SK1-TM-6-M12/63-PNBS-CPTFE

Ordercode: CS009J

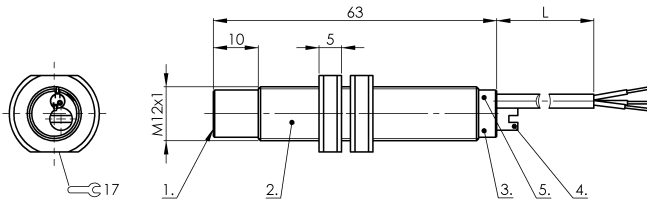

Wiring Diagram

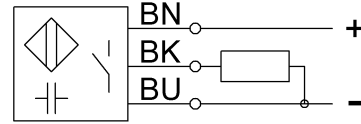

1) Sensing surface 2) Housing 3) Cover 4) Potentiometer 5) LED function indicator



Electrical connection

Cable length	2 m
Conductor cross-section	0.20 mm ²
Connection type	Cable, 2.00 m, PTFE
Number of conductors	3
Polarity reversal protected	yes
Short-circuit protection	yes

Electrical data

Hysteresis H max. (% of Sr)	15.0 %
Operating voltage Ub	12...35 VDC
Protected against miswiring	yes
Rated insulation voltage Ui	75 V DC
Rated operating current Ie DC	200 mA
Repeat accuracy max. (% of Sr)	2.0 %
Switching frequency	25 Hz
Utilization category	DC-13
Voltage drop static max.	0.8 V

Environmental conditions

Ambient temperature	-30...60 °C
Protection type IEC 60529	IP65

General data

Approval/Conformity	CE cULus
---------------------	-------------

Basic standard
Scope of delivery
Sensitivity

IEC 60947-5-2
Nut (2x)
Switching distance adjustable

Material

Cover material	PTFE
Housing material	PTFE
Material cover	PTFE
Material jacket	PTFE
Material sensing surface	PTFE

Mechanical data

Dimension	undefined
Installation	non-flush
Size	M12x1
Tightening torque	0.5 Nm

Output/Interface

Switching output	PNP Normally open (NO)
------------------	------------------------

Range/Distance

Measuring range	1...6 mm
Range	1...6 mm
Rated operating distance Sn	6 mm
Ripple max. (% of Ue)	10 %
Temperature drift max. (% of Sr)	15 %